

## SPLITTER UNIT 525

### TECHNICAL DATA



#### Basic machine (incl. feeding conveyor and screen deck)


|                         |                        |
|-------------------------|------------------------|
| Weight                  | 7.920 kg               |
| Length                  | 8.380 mm               |
| Width                   | 2.930 mm               |
| Height                  | 1.640 mm               |
| <b>Feeding conveyor</b> |                        |
| Version                 | Flat belt conveyor     |
| Belt length             | 3.100 mm               |
| Belt width              | 1.200 mm               |
| Drive                   | worm-helical gear unit |
| Power                   | 4,0 kW                 |
| <b>Screen deck</b>      |                        |
| Length                  | 5.000 mm               |
| Width                   | 2.500 mm               |
| Screen size             | selectable             |
| Drive                   | Bevel gear drive motor |
| Power                   | 2 x 4 kW               |

The technical data are approximate and depends on the machine equipment (subject to change without notice).



### Applications

Our splitter series can be applied universally when it comes to classifying waste and raw materials. It is equally suited for waste wood, green waste, household waste, landfill mining material, commercial waste, industrial waste, mixed construction waste and biowaste as well as for recyclable materials that have already been pre-processed.

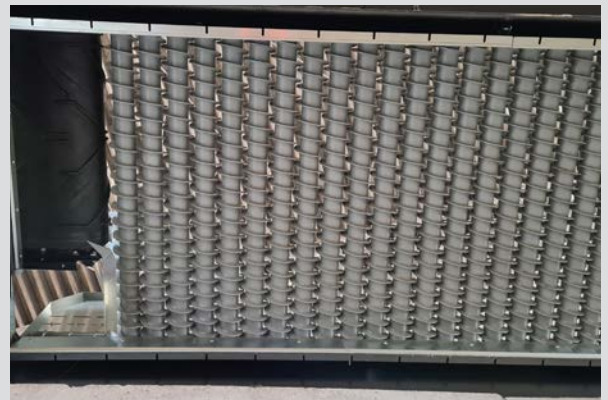

### All advantages at a glance

- Self-cleaning, nearly wrap-free thus optimal separation of difficult materials
- Impurity resistant
- Low stick grain
- Low maintenance and running costs
- Space saving